


KUBOTA ZERO-TURN DIESEL GARDEN MOWER

A hybrid zero-turn mower that combines ultramanoeuvrability with ultra-efficient, Two-Blade Glide Cut rear discharge for higher productivity.

GZD15

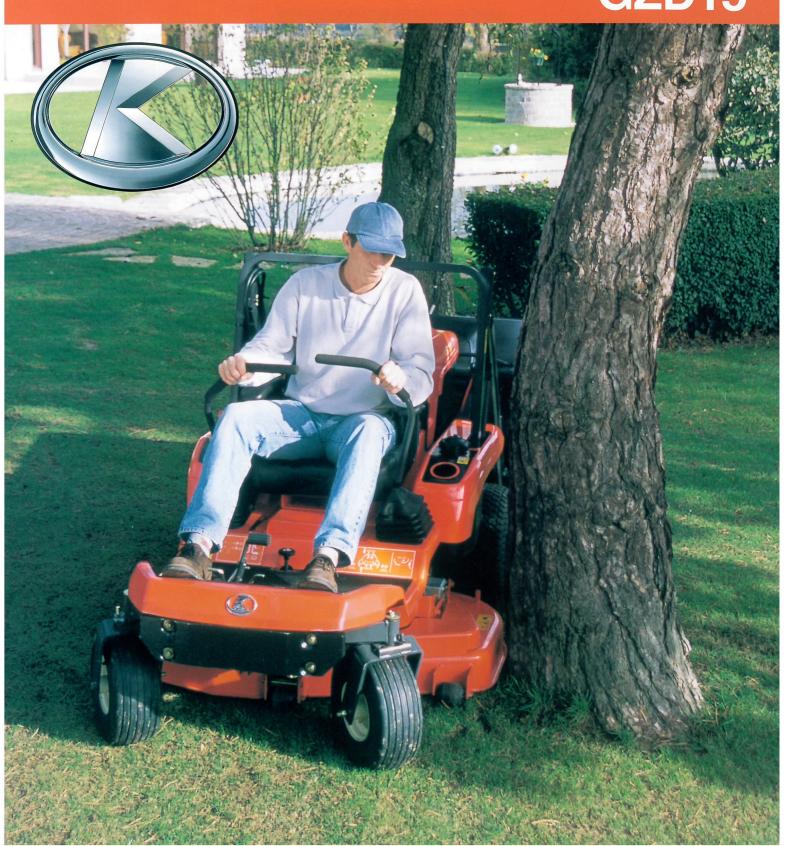

finish the day's job faster so you can be



1.8 m

Quick Clean System

Our Quick Clean System raises productivity by making it a snap to clear even wet grass without leaving the driver's seat. Simply use the lever to easily clear a path to the grass collector.



To clean the rear of



Deck cleaning pipe for connecting water hose

Kubota Diesel Engine

Amazingly rugged and dependable, the GZD15 zero-turn mower's fuel-efficient, 2-cylinder diesel engine lets you run longer with less fuel. Plus, the engine's 15-horsepower rating gives it the brawn to run smoothly for extended periods—while handling even tough jobs.



Large Capacity Fuel Tank

Requiring less stoppage for refueling, our large-volume, 20-liter fuel tank will keep you operating longer. Combine this with our fuel-efficient, high-torque diesel engine, and you've got the makings for a healthier bottom-line profit.

Deep Profile Mower Deck

Equipped with a deep mower deck (123.4 mm inner), the GZD15 zero-turn mower cuts faster—in fact, even tall, thick, or wet grass is no challenge.

Compact and Low Cost

The GZD15's compact and lightweight design makes it one of the easiest mowers to transport. And, loaded with cost-efficient features, it's sure to increase your profit by keeping overhead down.



The GZD15 zero-turn mower. Lets you

Efficiency

Impressive results quickly and economically

The Glide Cut Rear-Discharge System

Unlike other side-discharging collecting mowers that use a power-draining turbine, by employing Kubota's unique Glide Cut System, our GZD15 smartly utilises its two blades to cut, and then channel directly into the integrated rear grass catcher.



The Zero-Turn System

For incredibly nimble navigation, especially in and around flowerbeds, trees, and hedges, the Zero-Turn System provides the GZD15 with an easy-to-operate, dual-levered steering that has a 360-degree turning radius.



High Traveling Speed

With a top travel speed of 13.5 km/h, you'll cruise from job to job faster. And thanks to the GZD15 zero-turn mower's high cutting performance and fuel-efficient 15-hp diesel engine, you can finish your day's job faster than ever.

Mower Lifting Height

By utilising a pedal-operated hydraulic lift, the mid-mount mower can be quickly raised up to 135mm to provide higher ground clearance, and lowered just as easily.




Large Volume Grass Collector


You'll spend less time dumping grass and more time cutting it with our generously-sized, 400-liter grass collector.



With the high dump (HD) model, its convenient, hydraulic Parallel-Link System moves the grass collector vertically, allowing consistent, no-spill dumping at variable heights (0.9 m~1.8 m). Adjusting the system downward permits unloading under trees or other obstacles, while adjusting it upward to its maximum height of 1.8 m lets you unload into truck beds.



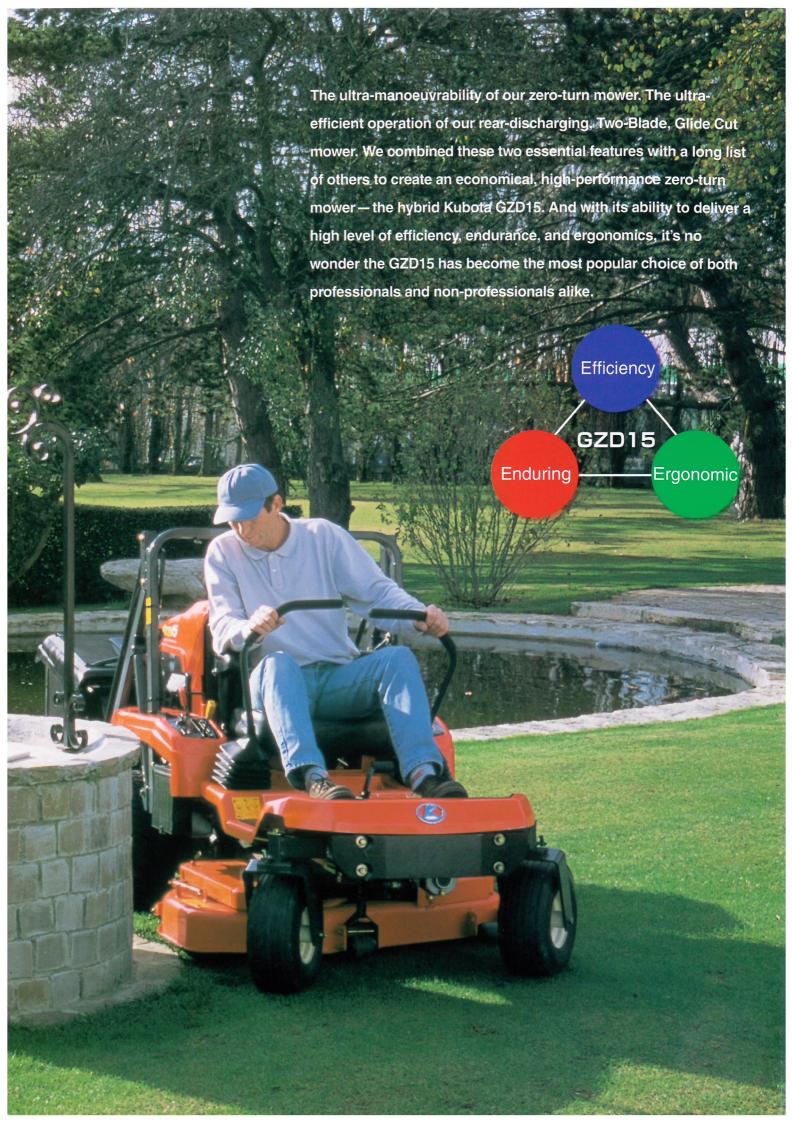

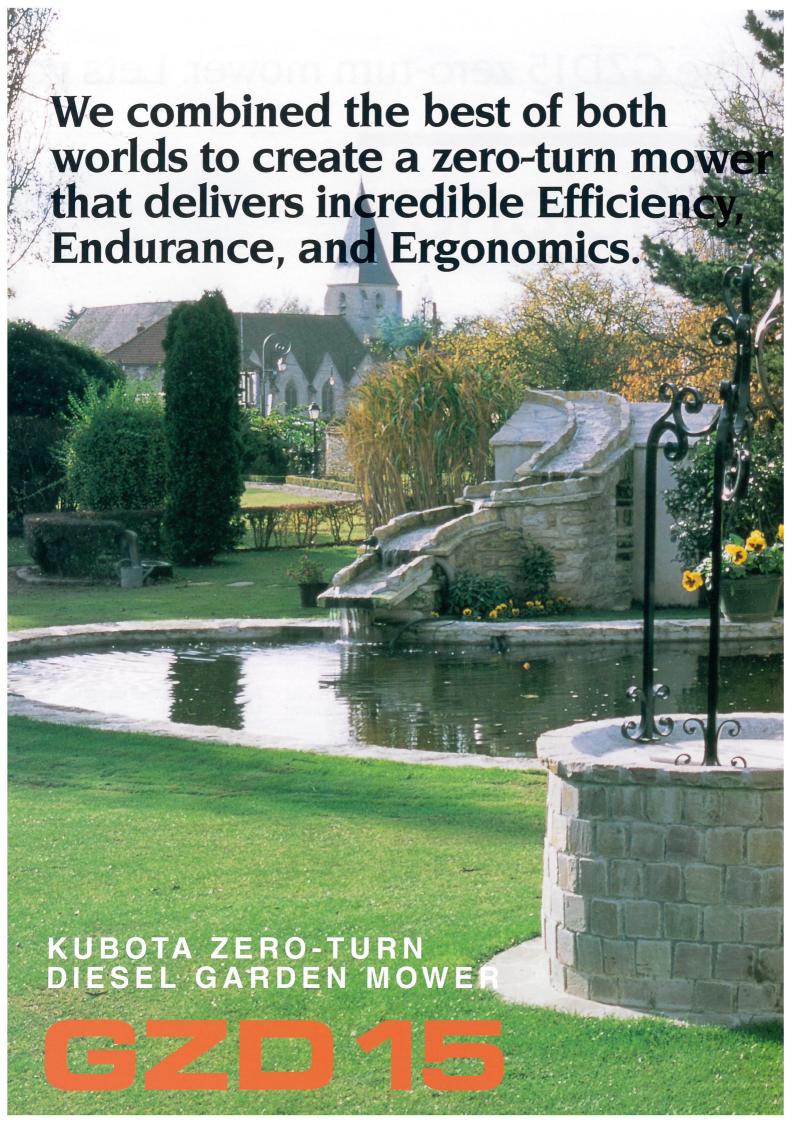

Specifications

| Model | | GZD15-LD GZD | 15-HD |
|-----------------|------------------------|---|-------------|
| Engine | Model | Kubota Z602 | |
| | Fuel type | Diesel Liquid-cooled (2 cyl.) | |
| | Displacement | 599 cc (36.5 cu. in.) | |
| | Power | 15 HP (11.2kw) | |
| | Fuel capacity | 20 ℓ | |
| | Battery | 12V (450 CCA) | |
| | Alternator | 15 Amps | |
| Tractor | Mower position | Mid-Mount | |
| | Front axle pivot | Standard | |
| | Туре | 4Wheels-2WD | |
| | Tyre size Front/Rear | 15×6.0-6/20.0×10-8 | |
| | Tread Front | 770 mm | |
| | Rear | 950/850 mm 2 positions | |
| | Wheel base | 1285 mm | |
| | Overall Length | 2785 mm | |
| | Overall Width | 1200 mm | |
| | Overall Height | | 5 mm |
| | Weight (w/mower & GC) | | 0 kg |
| Drive Train | Speed Front/Rear | 0–13.5 km/h / 0–10 km/h | |
| | T/M drive system | Shaft drive | |
| | Mower drive system | Shaft drive | |
| | Drive system | 2-HST | |
| | Steering style | 2-Hand Levers | |
| | Parking brake | Wet multi-discs, Mechanical equalising brake syste | am. |
| | Turning tradius | 0 m | #111 |
| РТО | PTO clutch | Hydraulic Wet Multi Discs | |
| | PTO brake | Hydraulic Wet Single Disc | |
| Mower | Cutting width | 42" (1067 mm) | |
| | Lift system | Hydraulic | |
| | Mount system | Parallel Linkage | |
| | Blade drive system | Hex belt, gear | |
| | Cutting height | 1–4 in. (1/4"), 4–5 in. (1/2") (25–102 mm (6 mm), 102–127 mm (13 mm)) | |
| | Cutting height adj. | Dial | |
| | Max. Mower lift height | 135 mm | |
| | No. of blades | 2 | |
| Grass Collector | Туре | Low dump/Hydraulic High dump | o/Hydraulic |
| | Capacity | 400 ℓ | |
| | Lift height (MAX) | — 18 m | (5.9 ft) |

The company reserves the right to change the above specifications without notice.

This brochure is for descriptive purpose only. Please contact your local Kubota dealer for warranty information.

Irish Grass Machinery Ltd

39 Rosemount Business Park Ballycoolin, Blanchardstown, Dublin 11. Tel: 01 899 1212

©2006 Kubota Corporation



KUBOTA (U.K.) LIMITED