

User Friendly and Compact



TP 130 PTO

RELIABLE
WOOD CHIPPING

DESIGNED



MANUFACTURED



DENMARK



TP 130 PTO is ideal for the chipping of branches and whole trees in various land scaping tasks such as park maintenance, greenkeeping ect. Tractor effect 25 - 60 hp.



For Effective Work in Green Areas

- TP 130 PTO has a strong and aggressive in feed based on the hydraulic driven feed roller
- Output is 8 mm wood chip produced in a very uniform quality
- Operated with the yellow safety bar that allows the operator to start, stop and reverse the feed roller
- The stress control system TP PILOT is recommended for tractors below 40 hp
- Adjustable foot in two positions
- Turnable discharge chute
- With 3 year product warranty





TP 130 PTO

Technical Data


Max. wood diameter	130 mm
Infeed opening	H x W = 130 x 220 mm
Chipping principle	Disc chipper
In feed angle	Parallel to driving direction
Feed roller	1 horizontal
Rotor disc diameter	660 mm
Rotor disc weight	82 kg
Number of blades	2
Counter steel	1 horizontal and 1 vertical
Chip length	8 mm
Effect need min.-max.	25 - 60 hp (18 - 45 kW)
PTO rotations per minute	540 rpm
Capacity	Up to 10 m ³ /hour
Weight	516 kg
Dimensions H x W x L	2392 x 1250 x 2423 mm



TP 130 PTO can also easily chip thin and soft branches - due to the short distance from the feed rollers to the blades and the position of both vertical and horizontal counter steel.



A TP SERVICEBOX comes as an option when purchasing a TP 130 PTO. The box contains critical wear parts such as blades and counter steel.

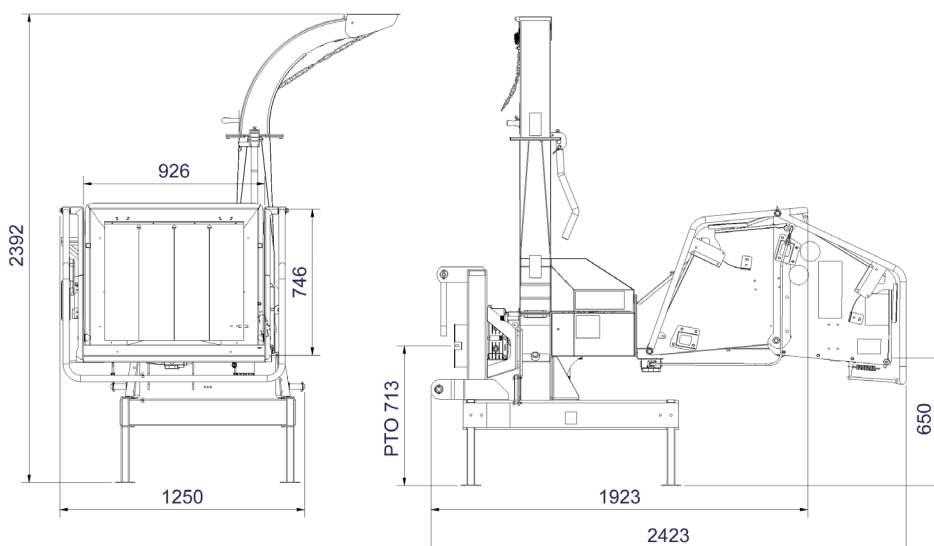

Linddana A/S

T +45 75 80 52 00

tp@linddana.com

www.linddana.com

