


## Verti-Drain® 7215

The Verti-Drain® 7215 is well suited to lower hp tractors where access is restricted or a lighter footprint is required.

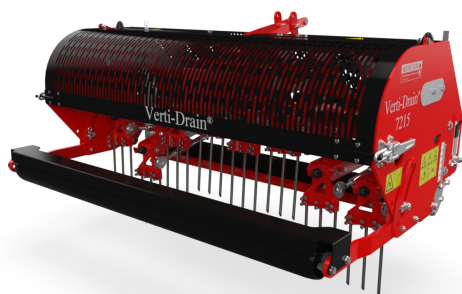

### Specifications

SKU	7215
Working width (m)	1.56
Working width (inch)	61
Max. Working depth (mm)	250
Max. Working depth (inch)	10
Working speed at hole spacing 65 mm	1
Weight (kg)	550
Weight (lbs)	1210
Hole distance with 12 mm tines (mm)	65
Hole distance with 1 2 x 6 inch tines (inch)	2.5
Hole distance with 18 mm tines (mm)	100
Hole distance with 3 4 x 9 inch tines (inch)	4
Hole spacing distance driving direction (mm)	25 - 165
Hole spacing distance driving direction (inch)	1 - 6-1/2
Max diameter solid tine (mm)	18 x 250
Max diameter solid tine (inch)	3/4 x 10
Max diameter hollow tine (mm)	25 x 250
Max diameter hollow tine (inch)	1 x 10
Min. Tractor HP required	25
Min. lifting capacity (kg)	700
Min. lifting capacity (LBS)	1540
Max. capacity with spacing 65 mm (m <sup>2</sup> hr)	1560
Max. capacity with spacing 2-1 2 inch (ft <sup>2</sup> hr)	11000
Three-point hitch	3-point CAT 1
Rpm Max.	500
Gear case oil	80W90
Lubricant	EP 2
Slip clutch setting	400 Nm